




IP66/IK09 LED ETANJ ARMATÜR PRO

DATASHEET(20W/40W/50W)

UP TO 125Lm/W

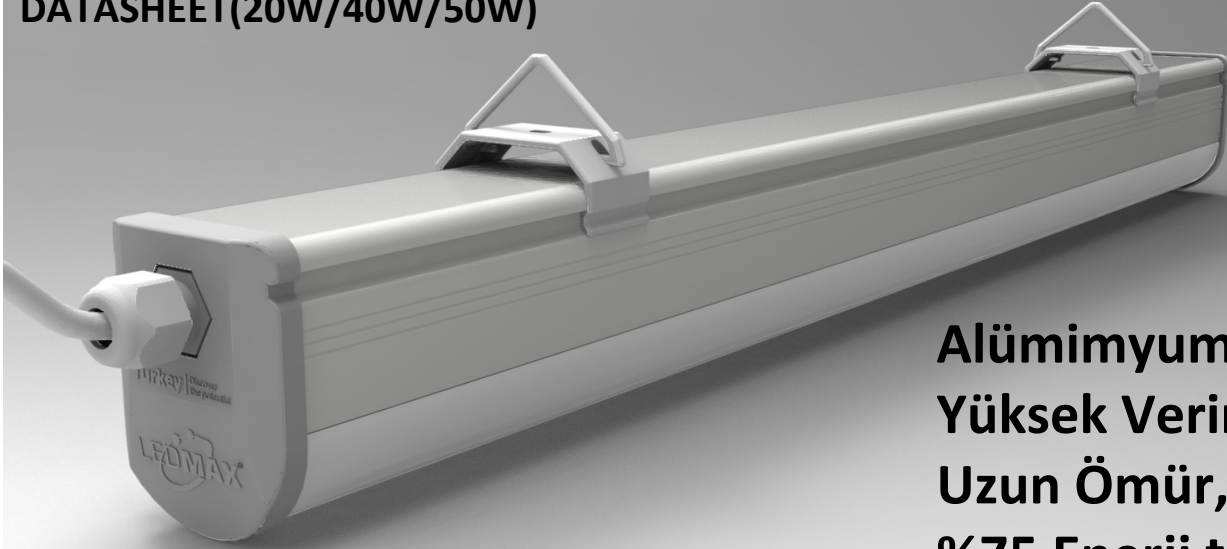


Alüminyum Gövde,
Yüksek Verimlilik,
Uzun Ömür,
%75 Enerji tasarrufu,
Ekonomik Fiyat.



Model No.	WLE-060-XXX	WLE120-XXX	WLE150-XXX
Dimension(mm)	600x50x70	1200x50x70	1500x50x70
Input voltage	AC190-240V		
Frequency	50Hz to 60Hz		
Power	21W	39W	50W
PF conversion	>0.95		
Power supply	CE, TUV certificated driver, ENEC certificated optional for projects		
LED quantity(pcs)	84	168	210
LED /Driver	LM80 Reported LED-ENEC Approved Led Driver		
LED type	2835 LED		
Luminous efficiency(lm)	2450 Lm Opal Diffuser	4850 Lm Opal Diffuser	6150 Lm Opal Diffuser
Color temerature	3000K 4000K 6500K		
CRI	80-90		
Beam angle	120°		
Warranty	3 Years		
Approval	CE -RoHS-ENEC(Driver)		
Main materials	Aluminum Housing + PC Milky Cover		
IP rating	IP65		
Life span	70,000 hours		
Standard packing	25pcs/ctn	25pcs/ctn	25pcs/ctn
G.W(kg)	18	35	41
Carton Size(mm)	670x400x250	1270x400x250	1570x400x250
Operating temperature	-20°C ~ + 50°C		
Storage temperature	-40°C ~ + 85°C		

LIGHT DISTRIBUTION

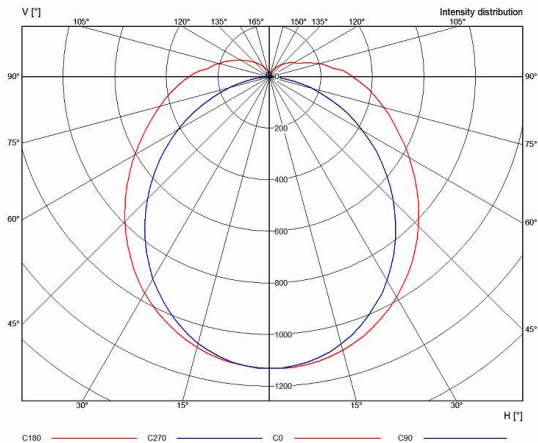

AVERAGE LUMINOUS LUX

